

NEW MEXICO HYDROCARBON SOURCE  
ROCK EVALUATION PROJECT

MAR OIL & GAS CO., NO.1 ESTES  
SEC.35, T5N, R8E, TORRANCE COUNTY, NEW MEXICO  
API NO. 30-057-20026  
NORTHEAST AREA  
GEOCHEM JOB NO. 3815

Prepared

for

PROGRAM PARTICIPANTS

by

Dr. Geoffrey S. Bayliss  
and  
Dr. Rudy R. Schwarzer


GEOCHEM LABORATORIES, INC.  
1143-C BRITTMORE ROAD  
HOUSTON, TEXAS 77043  
(713) 467-7011

CONFIDENTIAL  
MAY 1989

NEW MEXICO HYDROCARBON SOURCE ROCK EVALUATION

WELL NAME: MAR OIL & GAS CO., NO.1 ESTES  
 API NO.: 30-057-20026  
 AREA: NORTHEAST  
 LOCATION: TORRANCE COUNTY, NEW MEXICO SEC.35, T5N, R8E  
 GEOCHEM JOB NO.: 3815  
 TOTAL DEPTH: 2913 ft.  
 INTERVAL SAMPLED: 530-2770 ft.  
 TOTAL NUMBER OF SAMPLES: 8

GEOCHEM SAMPLE NUMBER	SAMPLE DEPTH	STRATIGRAPHIC INTERVAL	ANALYSES				
			LITHO	TOC	ROCK-EVAL	KEROGEN	OTHER
3815-001	530- 600	Abo	X	X	X	X	
3815-002	900-1000	Abo	X	X	X	X	
3815-003	1460-1550	Madera	X	X	X	X	
3815-004	1950-2030	Madera	X	X	X	X	
3815-005	2090-2150	Madera	X	X	X	X	
3815-006	2110-2160	Madera	X	X	X	X	
3815-007	2450-2550	Madera	X	X	X	X	
3815-008	2700-2770	Sandia	X	X	X	X	

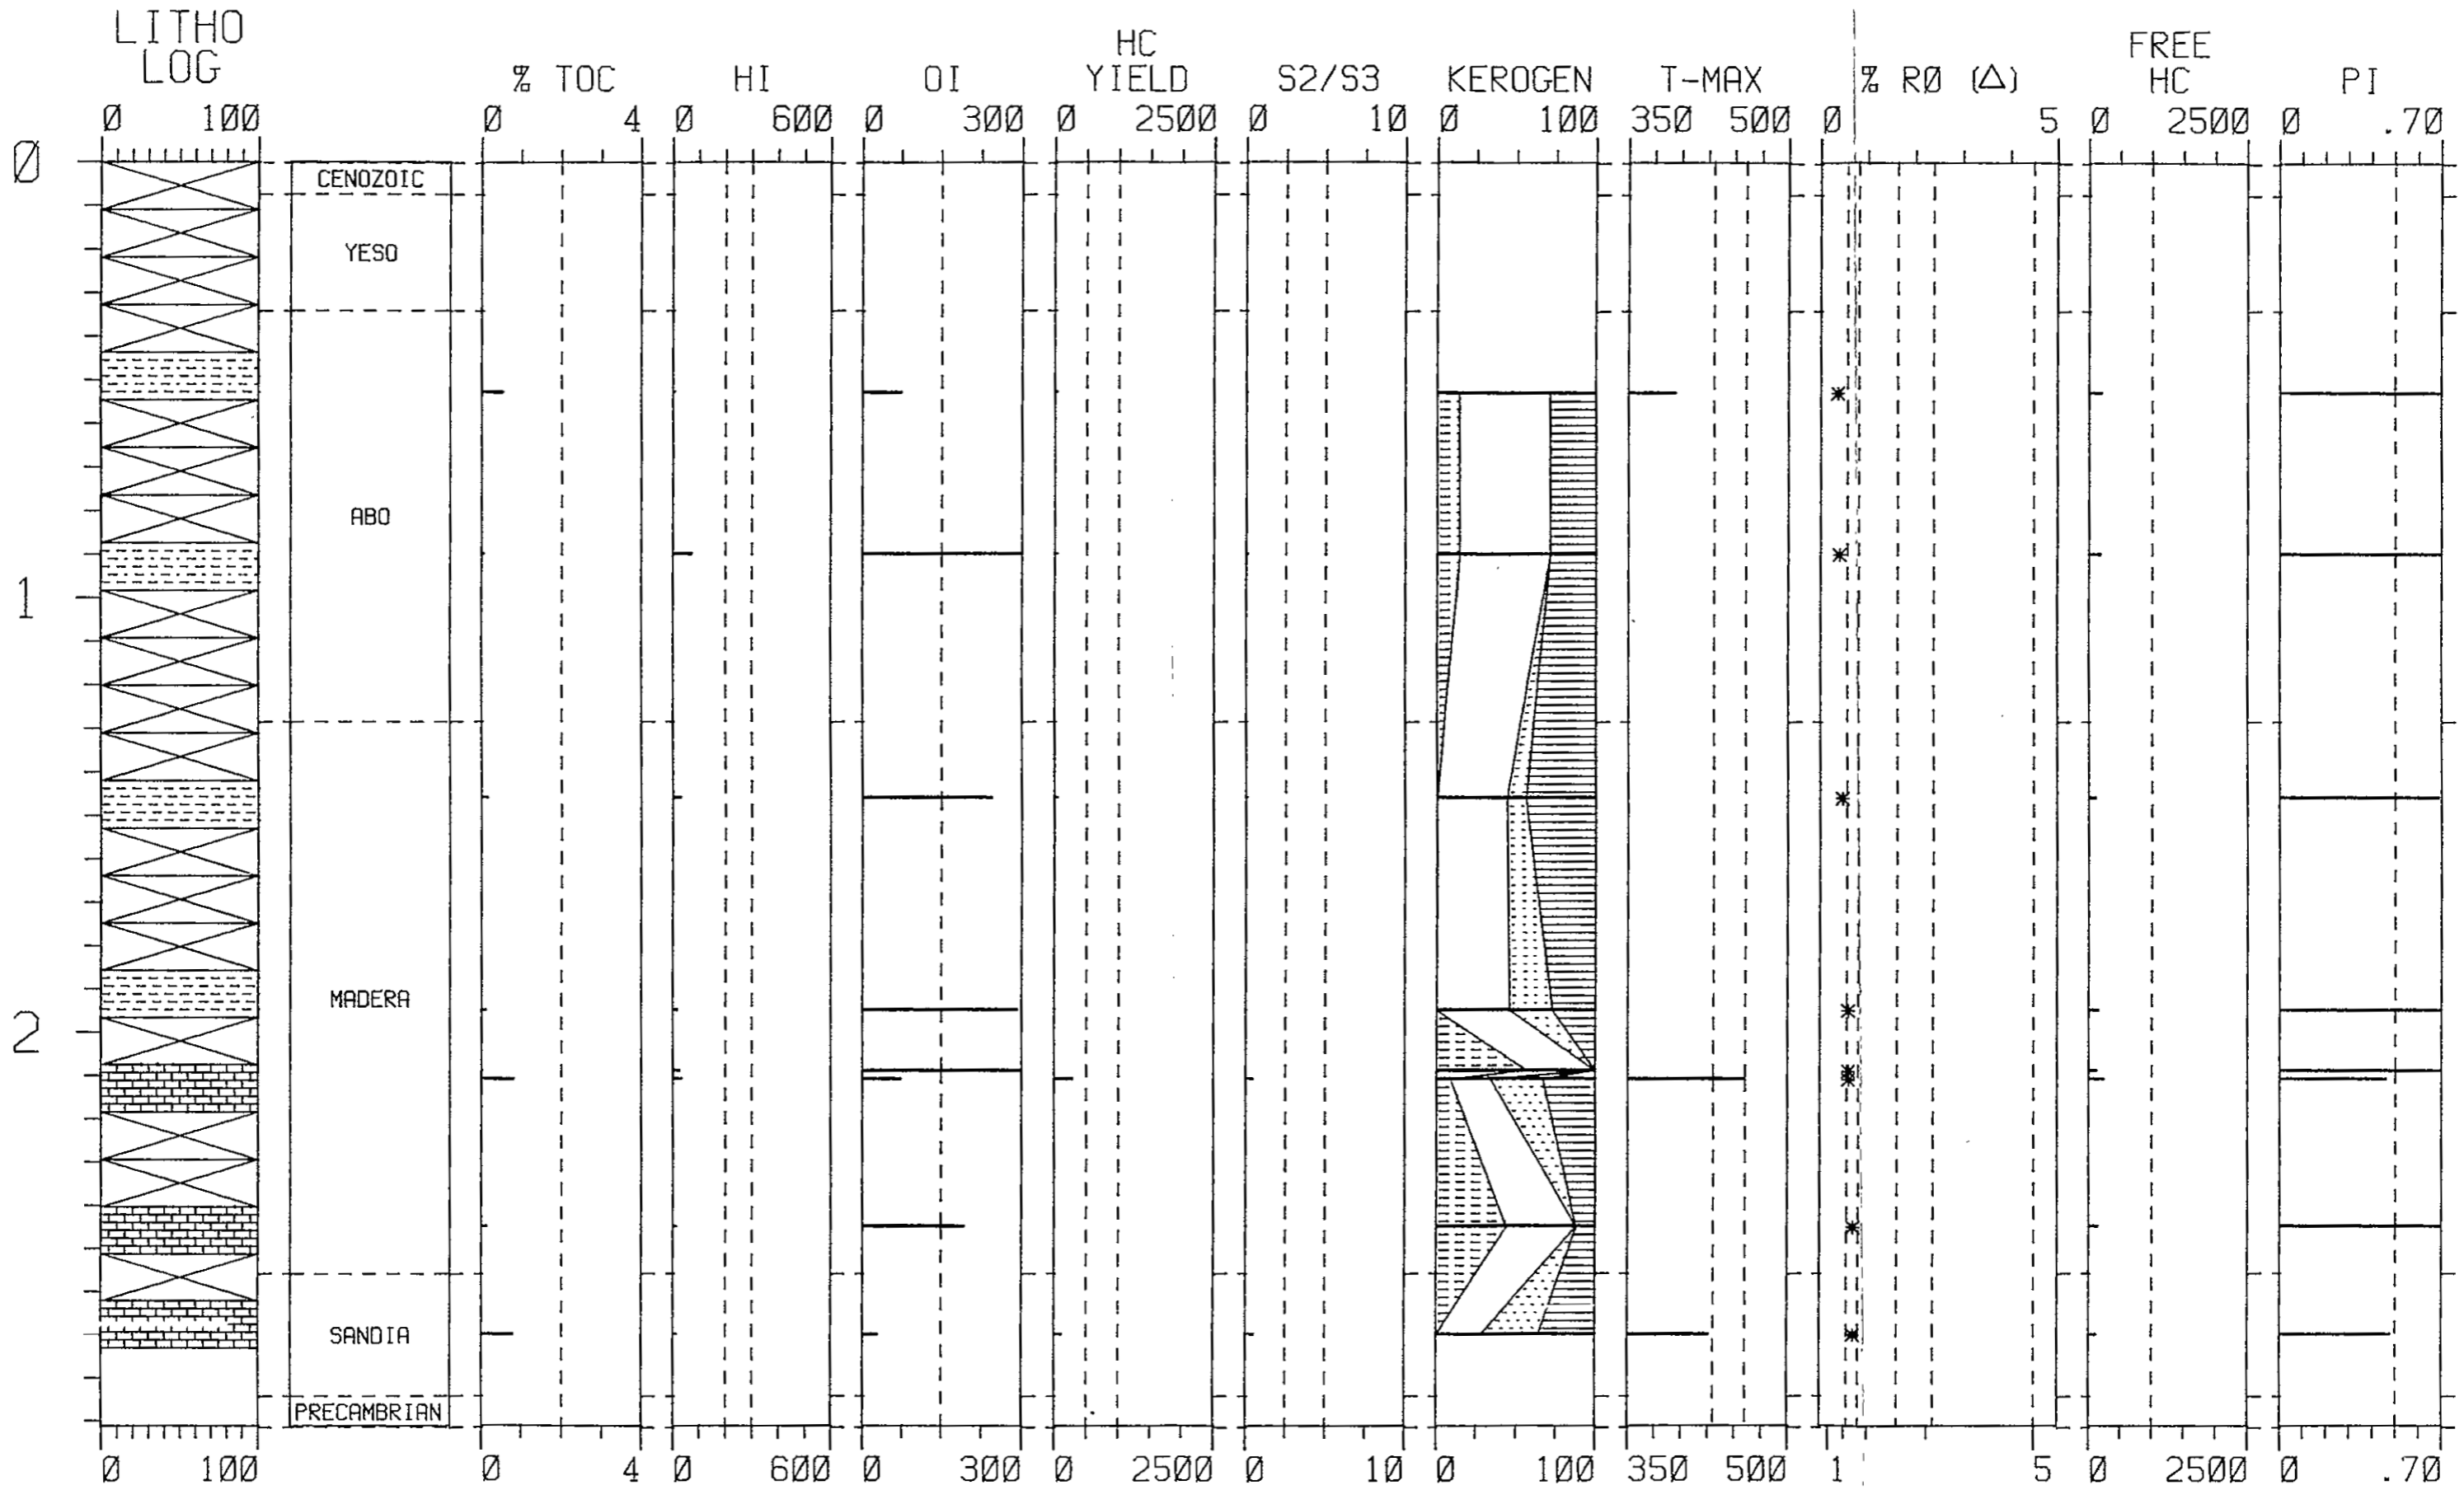

TAI (\*)

## TABLE I

RESULTS OF TOTAL ORGANIC CARBON

NEW MEXICO HYDROCARBON SOURCE ROCK EVALUATION

MAR OIL & GAS CO., NO.1 ESTES  
SEC.35, T5N, R8E, TORRANCE COUNTY, NEW MEXICO  
API #30-057-20026

---

GEOCHEM SAMPLE NUMBER	DEPTH INTERVAL (feet)	TOTAL ORGANIC CARBON (% of Rock)
3815-001	530- 600	0.09
3815-002	900-1000	0.07
3815-003	1460-1550	0.16/0.18
3815-004	1950-2030	0.12
3815-005	2090-2150	0.04
3815-006	2110-2160	0.82/0.83
3815-007	2450-2550	0.14
3815-008	2700-2770	0.79

---

TABLE II

LITHOLOGICAL DESCRIPTIONS AND ORGANIC CARBON ANALYSES

## NEW MEXICO HYDROCARBON SOURCE ROCK EVALUATION

MAR OIL &amp; GAS CO., NO.1 ESTES

SEC.35, T5N, R8E, TORRANCE COUNTY, NEW MEXICO

API #30-057-20026

GEOCHEM SAMPLE NUMBER	DEPTH INTERVAL (feet)	LITHO DESCRIPTION	GSA NO.	ORGANIC CARBON (wt.%)
3815-001 -A	530- 600	100% Mudstone, very silty, slightly calcareous, dark reddish brown.	10R-3/4	0.09
3815-002 -A	900-1000	100% Mudstone, very silty, slightly calcareous, dark reddish brown.	10R-3/4	0.07
3815-003 -A	1460-1550	100% Shale, slightly calcareous, micaceous, medium dark gray.	N4	0.16/0.18
3815-004 -A	1950-2030	100% Shale, slightly calcareous, micaceous, medium dark gray.	N4	0.12
3815-005 -A	2090-2150	100% Limestone, fine crystalline, light brownish gray.	5YR-6/1	0.04
3815-006 -A	2110-2160	100% Limestone, fine crystalline, light brownish gray.	5YR-6/1	0.82/0.83
3815-007 -A	2450-2550	100% Limestone, fine crystalline, light brownish gray.	5YR-6/1	0.14
3815-008 -A	2700-2770	100% Limestone, fine crystalline, light brownish gray.	5YR-6/1	0.79

TABLE III

SUMMARY OF ORGANIC CARBON AND VISUAL KEROGEN DATA

## NEW MEXICO HYDROCARBON SOURCE ROCK EVALUATION

MAR OIL & GAS CO., NO.1 ESTES  
 SEC.35, T5N, R8E, TORRANCE COUNTY, NEW MEXICO  
 API #30-057-20026

GEOCHEM SAMPLE NUMBER	DEPTH INTERVAL (feet)	TOTAL ORGANIC CARBON	ORGANIC MATTER TYPE	VISUAL ABUNDANCE NORMALIZED PERCENT					ALTERATION STAGE	THERMAL ALTERATION INDEX
				Al	Am	H	W	I		
3815-001	530- 600	0.09	H;I:Am**	0	14	57	0	29	1+ to 2-	1.5
3815-002	900-1000	0.07	H;I;Am**	0	14	57	0	29	1+ to 2-	1.6
3815-003	1460-1550	0.16/0.18	H-I;-;W	0	0	44	12	44	2- to 2	1.9
3815-004	1950-2030	0.12	H;W-I;-	0	0	46	27	27	2	2.2
3815-005	2090-2150	0.04	Am;H*;-	0	57	43	0	0	2	2.2
3815-006	2110-2160	0.82/0.83	W-I;H;Am	0	9	25	33	33	2	2.2
3815-007	2450-2550	0.14	Am-H*;-;I	0	44	44	0	12	2 to 2+	2.3
3815-008	2700-2770	0.79	W-I;H;-	0	0	28	36	36	2 to 2+	2.3

## LEGEND:

## KEROGEN KEY

Predominant;	Secondary;	Trace
60-100%	20-40%	0-20%

Al = Algal  
 Am = Amorphous-Sapropel  
 Am\* = Relic Amorphous-Sapropel  
 H = Herbaceous-Spore/Pollen  
 H\* = Degraded Herbaceous  
 W = Woody-Structured  
 U = Unidentified Material  
 I = Inertinite  
 C = Coaly

TABLE IV

RESULTS OF ROCK-EVAL PYROLYSIS ANALYSIS

## NEW MEXICO HYDROCARBON SOURCE ROCK EVALUATION

MAR OIL & GAS CO., NO.1 ESTES  
 SEC.35, T5N, R8E, TORRANCE COUNTY, NEW MEXICO  
 API #30-057-20026

GEOCHEM SAMPLE NUMBER	DEPTH INTERVAL (Feet)	TMAX (c)	S1 (mg/g)	S2 (mg/g)	S3 (mg/g)	PI	PC*	T.O.C. (wt.%)	HYDROGEN INDEX	OXYGEN INDEX
3815-001	530- 600	394	0.20	0.04	0.40	0.83	0.02	0.09	44	444
3815-002	900-1000	270	0.18	0.05	0.43	0.82	0.01	0.07	71	614
3815-003	1460-1550	270	0.11	0.05	0.39	0.69	0.01	0.17	29	229
3815-004	1950-2030	257	0.15	0.02	0.35	0.94	0.01	0.12	16	291
3815-005	2090-2150	194	0.12	0.01	0.23	1.00	0.01	0.04	25	575
3815-006	2110-2160	460	0.24	0.28	0.60	0.46	0.04	0.83	33	72
3815-007	2450-2550	338	0.14	0.02	0.27	0.87	0.01	0.14	14	192
3815-008	2700-2770	426	0.12	0.13	0.23	0.50	0.02	0.79	16	29

T.O.C. = Total organic carbon, wt.%

S1 = Free hydrocarbons, mg HC/g of rock

S2 = Residual hydrocarbon potential  
(mg HC/g or rock)S3 = CO<sub>2</sub> produced from kerogen pyrolysis  
(mg CO<sub>2</sub>/g of rock)

PC\* = 0.083 (S1 + S2)

Hydrogen  
Index = mg HC/g organic carbon

Oxygen

Index = mg CO<sub>2</sub>/g organic carbon


PI = S1/S1 + S2

TMAX = Temperature Index, degrees C.






INIT TEMP = 250 ISO TIME = 5 TEMP GRADIENT=25 TRAP STOP T = 390  
-----  
DEPTH: QTY :TMAX: S 1 : S 2 : S 3 : P I : S2/S3 : P C : TOC : H I : O I :  
-----  
111: 100.0: 432: 0.30: 6.20: 0.48: 0.05: 12.91: 0.54: 5.53: 112: 8:

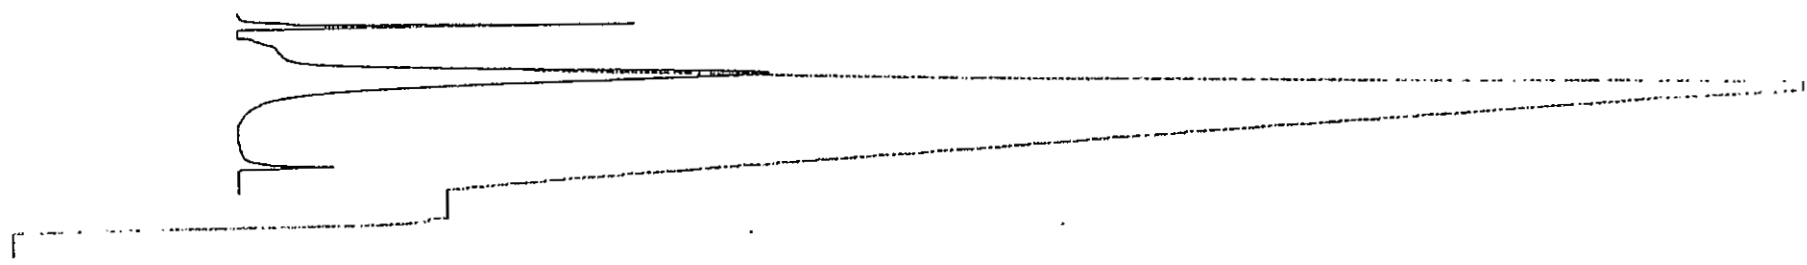


DATE: 05-16-89 BLANK CYCLE : 4 SCALE = 1/32

INIT TEMP = 250 ISO TIME = 5 TEMP GRADIENT=25 TRAP STOP T = 390  
S 1 = 00000000 S 2 = 00000000 S 3 = 00000514

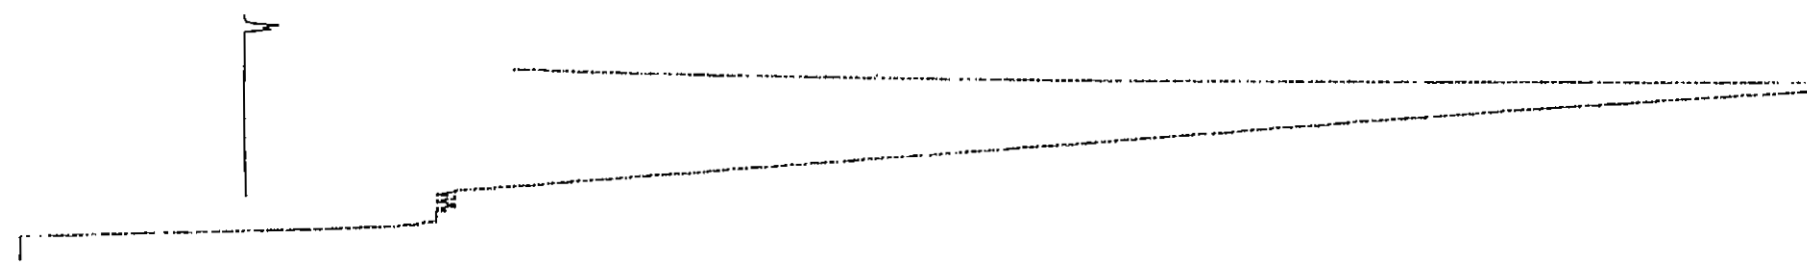


DATE: 05-16-89 STANDARD CYCLE : 4 SCALE = 1/32

INIT TEMP = 250 ISO TIME = 5 TEMP GRADIENT=25 TRAP STOP T = 390  
OTHER STD : S2= 6.00 S3= 0.43 S4 = 0.00 TMAX = 43  
STD QTY = 100.0 S 1 = 00001084 S 2 = 00022193 S 3 = 00002440 TMAX = 438

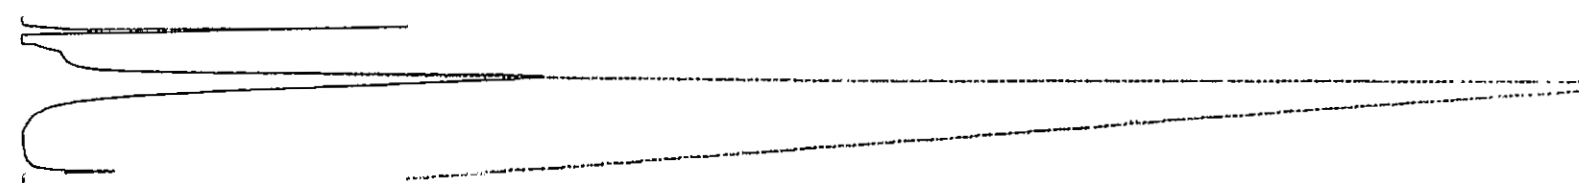

INIT TEMP = 250 ISO TIME = 5 TEMP GRADIENT = 25 TRAP STOP T = 390


DEPTH	QTY	TMAX	S 1	S 2	S 3	P I	S2/S3	P C	TOC	H I	O I
3815-003	98.1	270	0.11	0.05	0.39	0.69	0.12	0.01	0.17	29	229

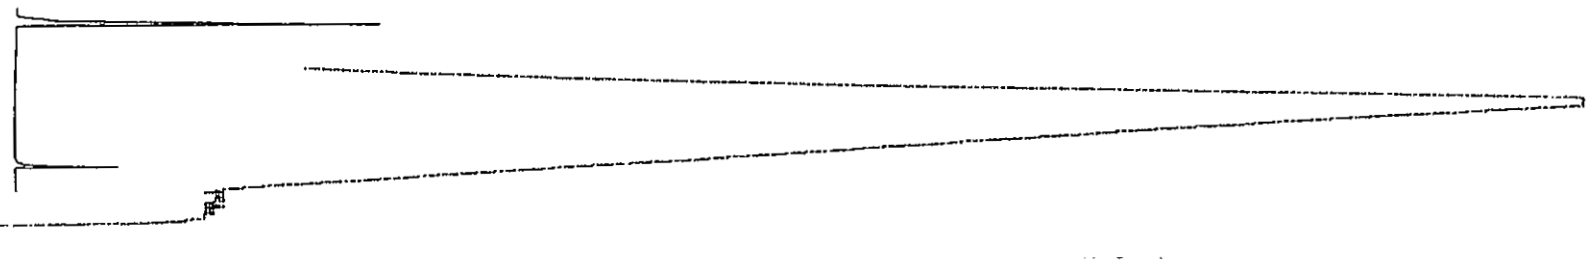

DATE: 05-16-89 ANALYSIS CYCLE : 4 SCALE = 1/32

INIT TEMP = 250 ISO TIME = 5 TEMP GRADIENT=25 TRAP STOP T = 390


DEPTH	QTY	TMAX	S 1	S 2	S 3	P I	S2/S3	P C	TOC	H I	O I
3815-002	96.2	270	0.18	0.05	0.43	0.82	0.11	0.01	0.07	71	614

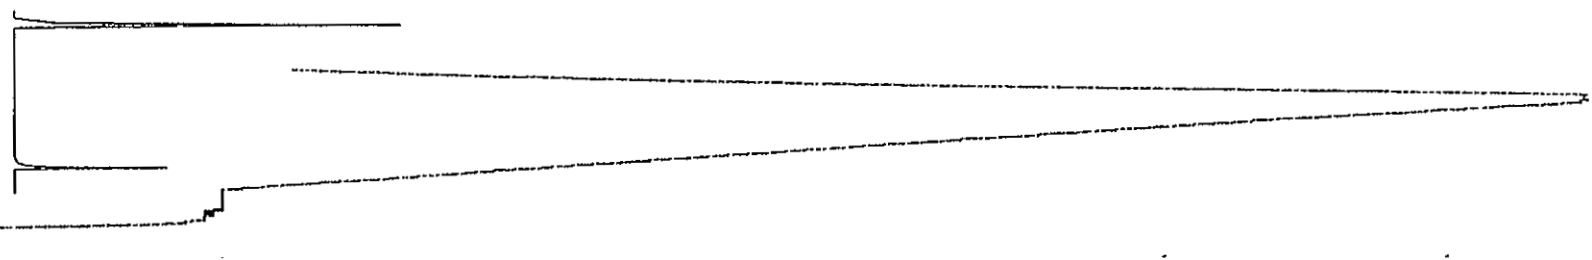


DATE: 05-16-89 ANALYSIS CYCLE : 4 SCALE = 1/32

INIT TEMP = 250 ISO TIME = 5 TEMP GRADIENT=25 TRAP STOP T = 390

DEPTH	QTY	TMAX	S 1	S 2	S 3	P I	S2/S3	P C	TOC	H I	O I
3915-001	98.3	394	0.20	0.04	0.40	0.83	0.10	0.02	0.09	44	444

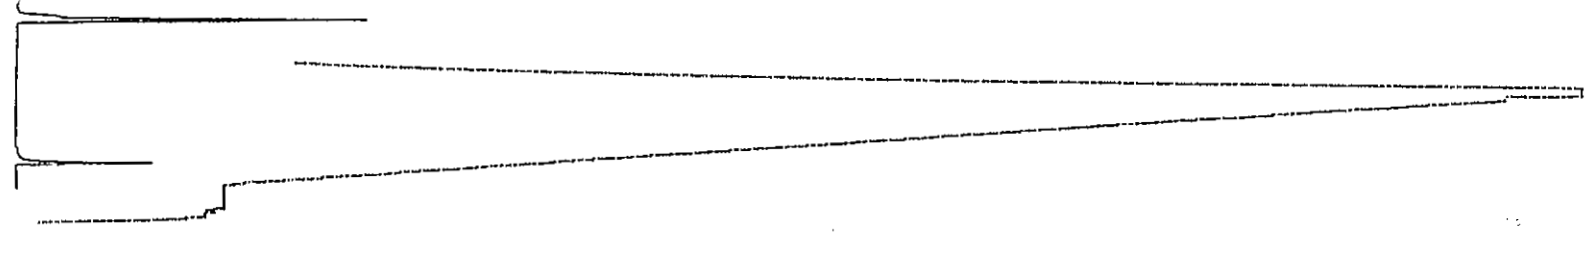


DEPTH	QTY	TMAX	S 1	S 2	S 3	P I	S2/S3	P C	TOC	H I	O I
3815-006	98.7	460	0.24	0.28	0.60	0.46	0.46	0.04	0.83	33	72

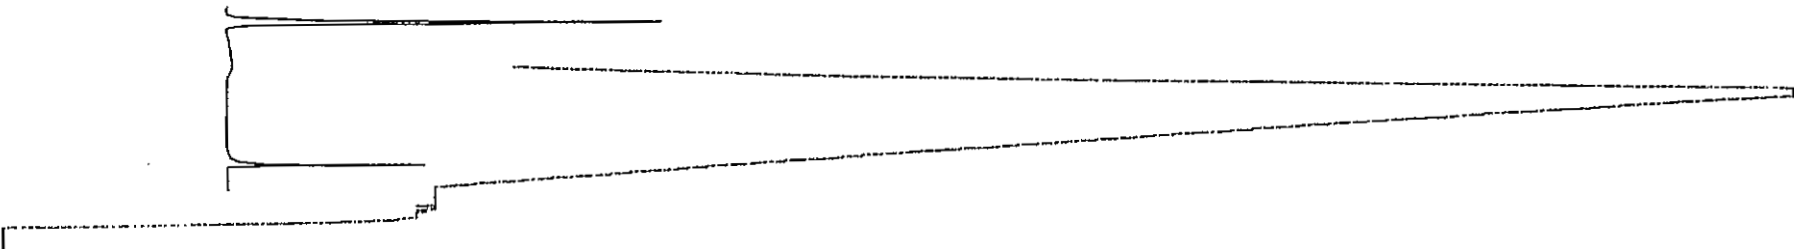

DATE: 05-16-89 ANALYSIS CYCLE : 4 SCALE = 1/32

INIT TEMP = 250 ISO TIME = 5 TEMP GRADIENT=25 TRAP STOP T = 390


DEPTH	QTY	TMAX	S 1	S 2	S 3	P I	S2/S3	P C	TOC	H I	O I
3815-005	98.7	194	0.12	0.01	0.23	1.00	0.04	0.01	0.04	25	575

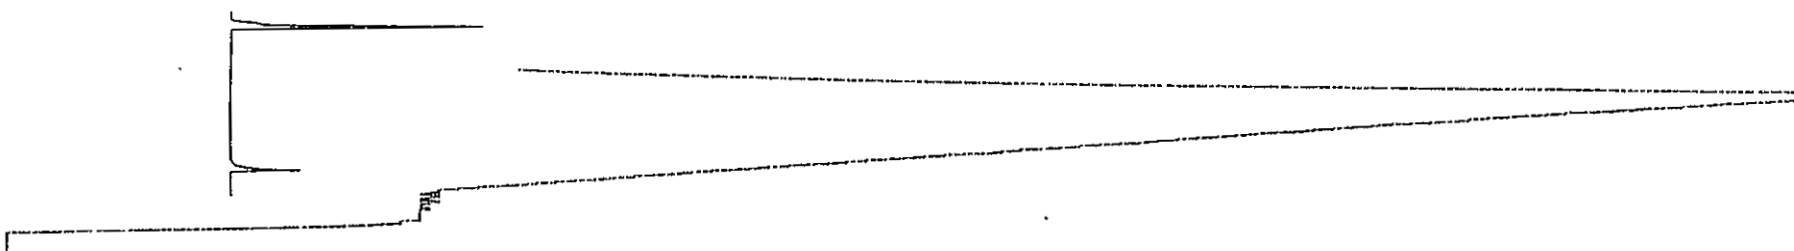


DATE: 05-16-89 ANALYSIS CYCLE : 4 SCALE = 1/32

INIT TEMP = 250 ISO TIME = 5 TEMP GRADIENT=25 TRAP STOP T = 390

DEPTH	QTY	TMAX	S 1	S 2	S 3	P I	S2/S3	P C	TOC	H I	O I
3815-004	96.8	257	0.15	0.02	0.35	0.94	0.05	0.01	0.12	16	291

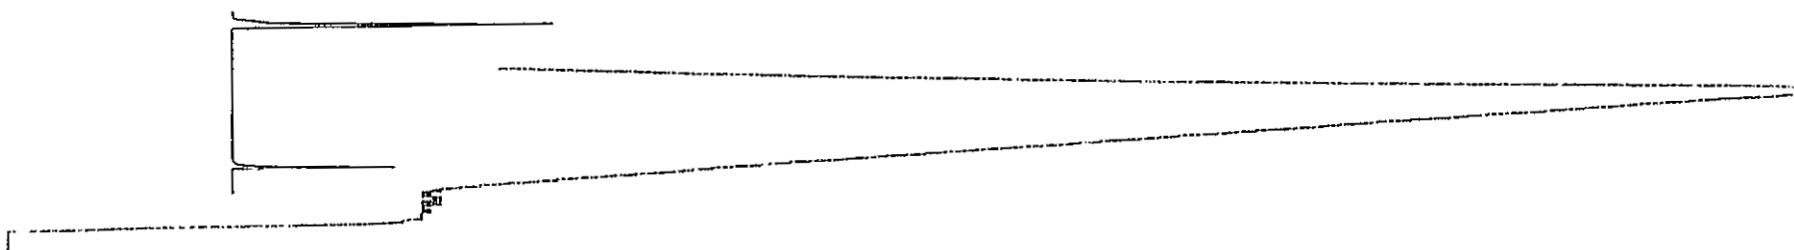

DA 17 16 2 41 75 70 11 11 11 11  
INIT TEMP = 250 ISO TIME = 5 TEMP GRADIENT=25 TRAP STOP T = 390  
-----  
:DEPTH: QTY :TMAX: S 1 : S 2 : S 3 : P I :S2/S3 : P C : TOC : H I : O I :  
-----  
3815-008: 98.1: 426: 0.12: 0.13: 0.23: 0.50: 0.56: 0.02: 0.79: 16 : 29 :

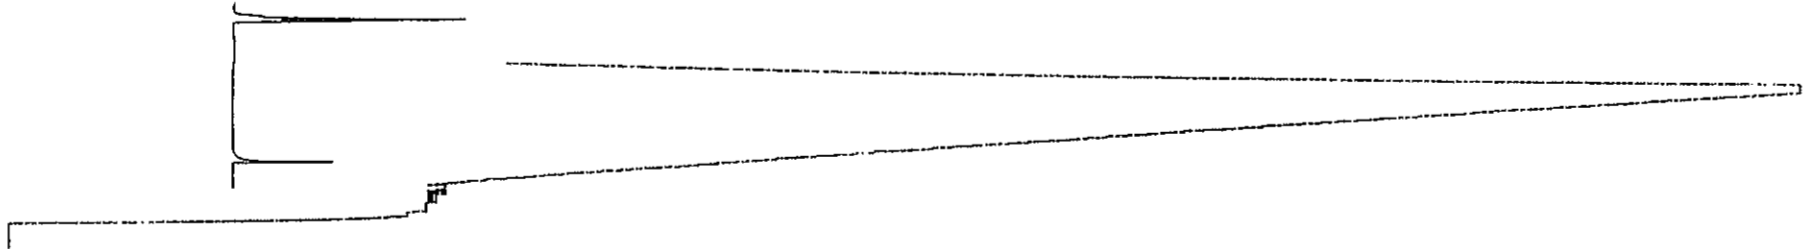


DATE: 05-16-89

ANALYSIS

CYCLE : 4

SCALE = 1/32












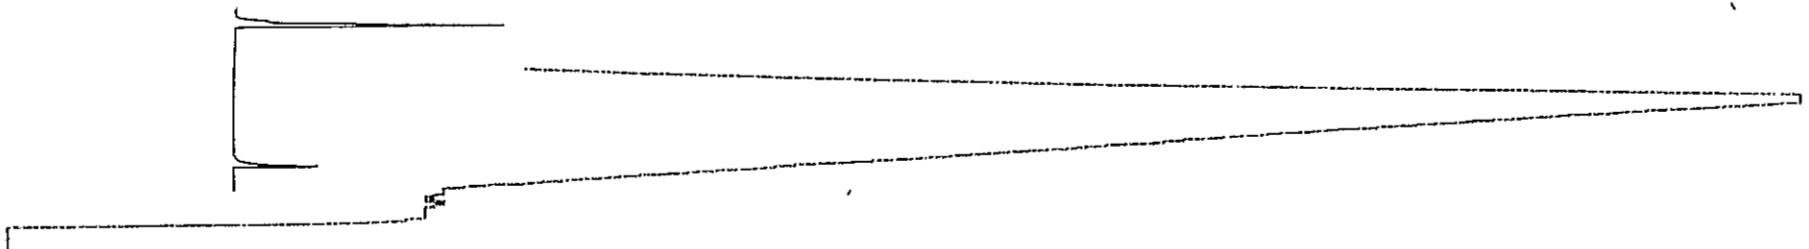






INIT TEMP = 250 ISO TIME = 5 TEMP GRADIENT=25 TRAP STOP T = 390  
-----  
:DEPTH: QTY :TMAX: S 1 : S 2 : S 3 : P I :S2/S3 : P C : TOC : H I : O I :  
-----  
3815-007: 97.8: 338: 0.14: 0.02: 0.27: 0.87: 0.07: 0.01: 0.14: 14 : 192 :







# LEGEND FOR SUMMARY DIAGRAM

<u>DEPTH:</u>	in feet
<u>LITHO LOG:</u>	see lithology symbols
<u>STRATIGRAPHY:</u>	by age
<u>% TOC:</u>	percent total organic carbon
<u>HI:</u>	Rock-Eval, Hydrocarbon Index = $100 S2(0/00 Wt)/TOC$
<u>OI:</u>	Rock-Eval, Oxygen Index = $100 S3(0/00 Wt)/TOC$
<u>HC YIELD:</u>	Rock-Eval, S2 peak (ppm)
<u>S2/S3:</u>	Rock-Eval, Ratio of S2 to S3 peak
<u>KEROGEN:</u>	see Kerogen symbols
<u>T-MAX:</u>	Rock-Eval, maximum temperature of S2 peak, in degrees Centigrade
<u>%RO (<math>\Delta</math>):</u>	Vitrinite Reflectance (scale 0 to 5)
<u>TAI (*):</u>	Thermal Alteration Index (Scale 1 to 5)
<u>FREE HC:</u>	Rock-Eval, S1 peak (ppm)
<u>PI:</u>	Rock-Eval, Productivity Index = $S1/(S1+S2)$

## LITHOLOGIES

	SHALE		SILICEOUS ROCKS
	MUDSTONE		EVAPORITES
	SILTSTONE		COAL
	SANDSTONE		IGNEOUS ROCKS
	CONGLOMERATE		VOLCANICS
	BRECCIA		METAMORPHIC ROCKS
	LIMESTONE		BASEMENT
	DOLOMITE		OTHER
	MARL		MISSING SECTION

## KEROGEN TYPES

	AMORPHOUS
	HEREACEOUS
	WOODY
	INERTINITE

Brief Description of Organic Geochemical analyses Carried Out by GeoChemC<sub>1</sub>-C<sub>7</sub> Hydrocarbon

The C<sub>1</sub>-C<sub>7</sub> hydrocarbon content and composition of sediments reflects source type, source quality and thermal maturity.

The C<sub>1</sub>-C<sub>7</sub> hydrocarbon content of well cuttings is determined by analyzing both a sample of the cuttings and the air space at the top of the can. The results of the two analyses are summed to give an inventory of the C<sub>1</sub>-C<sub>7</sub> hydrocarbon content of the well cuttings prior to any losses from the cuttings during the lapsed time period between collection at the wellsite and laboratory analysis.

The air space C<sub>1</sub>-C<sub>7</sub> hydrocarbon analysis involves taking a measured volume of the air space gas out of the can with a syringe and injecting same into a gas chromatograph. GeoChem uses a Varian Aerograph Model 1400 instrument equipped with a Porapac Q column. The gas sample is taken through the column by a carrier gas and before reaching the detector is separated into its various C<sub>1</sub> (methane), C<sub>2</sub> (ethane), C<sub>3</sub> (propane), iC<sub>4</sub> (isobutane), nC<sub>4</sub> (normal butane), and C<sub>5</sub>, C<sub>6</sub>, C<sub>7</sub> hydrocarbon components.

This particular analysis gives a complete separation of the C<sub>1</sub>-C<sub>4</sub> gas-range hydrocarbons and a partial separation of the C<sub>5</sub>-C<sub>7</sub> gasoline-range hydrocarbons. (A detailed C<sub>4</sub>-C<sub>7</sub> analysis, to be discussed later, involving a capillary column, effects a complete separation of this molecular range into its several individual molecular species.)

The electrical response of the various hydrocarbons as they reach the detector is recorded on a paper strip chart as a peak. This response is simultaneously fed to an integrator which computes the area of each peak. The concentration of C<sub>1</sub>-C<sub>7</sub> hydrocarbons in the air space, expressed as volumes of gas per million volumes of cuttings, is determined by a calculation involving the volume of cuttings, volume of air space in the can, volume of sample injected, volume of standard gas sample used in the calibration, calibration factor for C<sub>1</sub>, C<sub>2</sub>, C<sub>3</sub>, etc. determined by gc analysis of a standard gas sample, and the gc peak response.

The C<sub>1</sub>-C<sub>7</sub> hydrocarbon content of the cuttings is determined by degasification of a measured volume of cuttings (in a medium of a measured volume of water) in a closed blender, sampling of the air space at the top of the blender, and injection of a measured volume of gas into the gas chromatograph.

The C<sub>1</sub>-C<sub>7</sub> hydrocarbon data from the air space and cuttings gas analyses are summed to give a "restored" C<sub>1</sub>-C<sub>7</sub> hydrocarbon content of the cuttings.

Sample Washing and Hand-Picking of Uncaved Lithology Samples

The cuttings samples are washed to remove all drilling mud from the cuttings. Care is taken in the washing procedure not to remove any soft clays, claystones, etc. and any loose fine sand and silt. The washed cuttings are usually kept under water cover until picked, to prevent loss of any gasoline-range hydrocarbons. Using the C<sub>1</sub>-C<sub>7</sub> hydrocarbon data profile and the electrical well log supplied to us and our visual examination of the cuttings material under the binocular microscope, we carefully hand-pick and describe a suite of uncaved lithologies representative of the various stratigraphic zones penetrated by the well. The lithological data is used to compile a gross litho percentage log which is shown on all Figures. The 2-4 gram picked lithology samples are stored under water in small glass vials in those instances where we wish to run detailed C<sub>4</sub>-C<sub>7</sub> hydrocarbon analyses. This sample set is used not only for the C<sub>4</sub>-C<sub>7</sub> hydrocarbon analysis, but also for the visual kerogen and total organic carbon analyses. All remaining cuttings material is dried and packaged in labelled plastic bags for possible C<sub>15+</sub> soxhlet extraction and/or eventual return to the client. Sample material from this study will be retained at GeoChem until advised of disposition.

Detailed C<sub>4</sub>-C<sub>7</sub> Hydrocarbon

The C<sub>4</sub>-C<sub>7</sub> gasoline-range hydrocarbon content of sediments reflects source quality, thermal maturation and organic facies. Compositional data can be used in crude oil-parent rock correlation work.

The C<sub>4</sub>-C<sub>7</sub> hydrocarbon content and detailed molecular composition of hydrocarbon, in hand-picked lithologies, is determined by a gc analysis of the light hydrocarbon extracted from 1-2 gram cuttings samples macerated in a microblender. A measured volume of sample is placed in a sealed microblender along with a measured volume of hot water. The rock sample is pulverized by the blades of the blender. A sample of the liberated light hydrocarbons which collect in the air space at the top of the blender is injected into our Varian Aerograph 1400 gc unit which is equipped with a capillary column. Data recording, computations, etc. are comparable to those used for the C<sub>1</sub>-C<sub>7</sub> analysis discussed previously in this report. Hydrocarbon concentration is expressed as volume gas per million volumes of cuttings.

Organic Carbon

The total organic carbon content of a rock is a measure of its total organic richness. This data is used, in conjunction with visual kerogen and C<sub>1</sub>-C<sub>4</sub>, C<sub>4</sub>-C<sub>7</sub> and C<sub>15+</sub> hydrocarbon content of a rock, to indicate the hydrocarbon source quality of rocks.

The procedure for determining the total organic carbon content of a rock involves drying the sample, grinding to a powder, weighing out 0.2729 gram sample into a crucible, acidizing with hot and cold hydrochloric acid to remove calcium and magnesium carbonate, and carbon analysis by combustion in a Leco carbon analyzer.

We run several blank crucibles, standards (iron rings of known carbon content) and duplicate rock samples in this analysis at no additional charge to the client for purposes of data quality control.

C<sub>15+</sub> Soxhlet Extraction, Deasphalting and Chromatographic Separation

The amount and composition of the organic matter which can be solvent-extracted from a rock reflects source quality and source type. C<sup>13</sup>/C<sup>12</sup> carbon isotopic, high mass spectrometric and gc analyses of the paraffin-naphthene and aromatic hydrocarbon fractions of the soluble extract gives data which is used in crude oil-parent rock correlations.

This analysis involves grinding of a dry rock sample to a powder and removal of the soluble organic matter by soxhlet extraction using a co-distilled toluene-methanol azeotropic solvent. Where the amount of available sample material permits, we like to use at least 100 grams of rock for this analysis.

The extracted bitumen is separated into an asphaltene (ASPH) and a pentane soluble fraction by normal pentane precipitation. The pentane soluble components are separated into a C<sub>15+</sub> paraffin-naphthene (P-N) hydrocarbon, C<sub>15+</sub> aromatic hydrocarbon (AROM) and C<sub>15+</sub> nitrogen-sulfur-oxygen containing fraction (NSO) by adsorption chromatography on a silica gel-alumina column using pentane, toluene and toluene-methanol azeotropic eluents.

## APPENDIX A (continued)

### GC Analysis of C<sub>15+</sub> Paraffin-Naphthene (P-N) Hydrocarbons

The content and molecular composition of the heavy C<sub>15+</sub> paraffin-naphthene (P-N) hydrocarbons of rocks, as determined by gc analysis, reflects source quality, source type and degree of thermal maturation.

In this analysis, we subject a very small fraction of the total amount of the P-N fraction extracted from a rock sample to gc analysis. The gas chromatograph is a Varian Aerograph Model 1400 equipped with a solid rod injection system and a eutectic column.

The calculated C. P. I. (carbon preference index) values for the normal paraffin data is defined as the mean of two ratios which are determined by dividing the sum of concentrations of odd-carbon numbered n-paraffins by the sum of even-carbon numbered n-paraffins. The C. P. Indices A and B were obtained by the formulas;

$$\text{C. P. Index A} = \frac{\frac{C_{21}+C_{23}+C_{25}+C_{27}}{C_{22}+C_{24}+C_{26}+C_{28}} + \frac{C_{21}+C_{23}+C_{25}+C_{27}}{C_{20}+C_{22}+C_{24}+C_{26}}}{2}$$

$$\text{C. P. Index B} = \frac{\frac{C_{25}+C_{27}+C_{29}+C_{31}}{C_{26}+C_{28}+C_{30}+C_{32}} + \frac{C_{25}+C_{27}+C_{29}+C_{31}}{C_{24}+C_{26}+C_{28}+C_{30}}}{2}$$

### Visual Kerogen

A visual study of kerogen, the insoluble organic matter in rocks, can indicate the relative abundance, size, and state of preservation of the various recognizable kerogen types and thereby indicate the hydrocarbon source character of a rock. The color of the kerogen can be used to indicate the state of thermal maturity of the sediments (i.e. their time-temperature history). Thermal maturation plays an important role in the generation of hydrocarbons from organic matter, and also affects the composition of reservoir hydrocarbons.

Our procedure for visual kerogen slide preparation involves isolation of the organic matter of a rock by removal of the rock material with hydrochloric and hydrofluoric acid treatment and heavy liquid separation. This procedure is comparable to that used by the palynologist except it does not include an oxidation stage. (The oxidation treatment is deleted from our procedure because it removes a great deal of kerogen and blanches any remaining kerogen to an extent whereby it is useless for our kerogen color observations.) The kerogen residue is mounted on a glass slide and is examined visually under a high power microscope.

### Vitrinite Reflectance

Measurement of the reflectivity of vitrinite particles (%R<sub>o</sub>) present in the kerogen isolated from sedimentary rocks provides a method of determining the state of maturation, and the diagenetic (time-temperature) history of the organic matter present in the sediments.

The kerogen, obtained from a 25 gram aliquot of crushed rock by the acid procedure previously discussed, is dried and embedded in a Bioplastic plug. The surface of the plug is polished using 0.05 micron alumina and the reflectivity determined under oil using a Ziess high resolution microscope. A minimum of 40 values are required to adequately determine the Maturation Rank.

### Fluorescence Spectrophotometric Analysis

Fluorescence spectrophotometry can be used to characterize and fingerprint crude oils, establish crude oil-source rock relationships, and to measure the hydrocarbon source potential of fine-grained sediments.

A one (1) microliter aliquot of either (i) a crude oil or (ii) the solvent extractable rock bitumen, is passed through an alumina/silica gel micro column and the C<sub>10+</sub> aromatic hydrocarbons isolated. The aromatic hydrocarbon is diluted and the emission and excitation spectra determined at 240 nm and 420 nm using a Perkin-Elmer Model 512 Double Beam Fluorescence Spectrophotometer.

## GEOHERMAL DIAGENETIC CRITERIA

(GEOCHEM LABORATORIES, INC)

