



New Mexico Bureau of Mines & Mineral Resources

Socorro, NM 87801

A DIVISION OF
NEW MEXICO INSTITUTE OF MINING & TECHNOLOGY

Information: 505/835-5420
Publications: 505/835-5410

OPEN-FILE REPORT 315

HYDROCARBON SOURCE ROCK EVALUATION OF,
TRANSOCEAN, MCKEE NO. 1,
SEC. 4, T13N, R9E, SANTA FE COUNTY,
NEW MEXICO

By G. S. Bayliss and R. R. Schwarzer

December 1987

NEW MEXICO HYDROCARBON SOURCE
ROCK EVALUATION PROJECT

TRANSOCEAN, MCKEE NO.1
SEC.4, T13N, R9E, SANTA FE COUNTY, NEW MEXICO
API NO. 30-049-20005
NORTHWEST AREA
GEOCHEM JOB NO. 3595

Prepared

for

PROGRAM PARTICIPANTS

by

Dr. Geoffrey S. Bayliss
and
Dr. Rudy R. Schwarzer

GEOCHEM LABORATORIES, INC.
1143-C BRITTMORE ROAD
HOUSTON, TEXAS 77043
(713) 467-7011

CONFIDENTIAL
DECEMBER 1987

NEW MEXICO HYDROCARBON SOURCE ROCK EVALUATION

WELL NAME: TRANSOCEAN, MCKEE NO.1
 API NO.: 30-049-20005
 AREA: NORTHWEST
 LOCATION: SANTA FE COUNTY, NEW MEXICO SEC.4, T13N, R9E
 GEOCHEM JOB NO.: 3595
 TOTAL DEPTH: 7634 ft.
 INTERVAL SAMPLED: 1500-7950 ft.
 TOTAL NUMBER OF SAMPLES: 21

GEOCHEM SAMPLE NUMBER	SAMPLE DEPTH	STRATIGRAPHIC INTERVAL	ANALYSES				
			TOC	LITHO	ROCK-EVAL	KEROGEN	OTHER
3595-001	1500-1560	Juana Lopez	X	X	X	X	
3595-002	1510-1520	Juana Lopez	X	X	X	X	
3595-003	1930-1950	Greenhorn	X	X	X	X	
3595-004	2010-2040	Graneros (1)	X	X	X	X	
3595-005	3380-3390	Todilto (2)	X	X	X	X	
3595-006	3390-3400	Todilto (2)	X	X	X	X	
3595-007	5600-5610	Yeso	X	X	X	X	
3595-008	5610-5620	Yeso	X	X	X	X	
3595-009	6950-6970	Pennsylvanian	X	X	X	X	
3595-010	7010-7030	Pennsylvanian	X	X	X	X	
3595-011	7050-7070	Pennsylvanian	X	X	X	X	
3595-012	7060-7080	Pennsylvanian	X	X	X	X	
3595-013	7140-7150	Pennsylvanian	X	X	X	X	
3595-014	7230-7240	Pennsylvanian	X	X	X	X	
3595-015	7270-7290	Pennsylvanian	X	X	X	X	
3595-016	7360-7380	Pennsylvanian	X	X	X	X	
3595-017	7400-7420	Pennsylvanian	X	X	X	X	
3595-018	7630-7650	Pennsylvanian	X	X	X	X	
3595-019	7760-7780	Pennsylvanian	X	X	X	X	
3595-020	7840-7860	Mississippian	X	X	X	X	
3595-021	7930-7950	Mississippian	X	X	X	X	

NOTE (1): The Graneros is included with the Greenhorn on the Summary Plot.

NOTE (2): The Todilto samples are plotted in the Entrada on the Summary Plot because of a discrepancy between sample picks and stratigraphic picks.

TABLE II (continued)

LITHOLOGICAL DESCRIPTIONS AND ORGANIC CARBON ANALYSES

NEW MEXICO HYDROCARBON SOURCE ROCK EVALUATION

TRANSOCEAN, MCKEE NO.1

SEC.4, T13N, R9E, SANTA FE COUNTY, NEW MEXICO

API #30-049-20005

GEOCHEM SAMPLE NUMBER	DEPTH INTERVAL (feet)	LITHO DESCRIPTION	GSA NO.	ORGANIC CARBON (wt.%)
3595-006 (continued)				
-B		20% Anhydrite, fine crystalline, white.	N9	
3595-007	5600-5610			
-A		20% Dolomite, fine crystalline, medium dark gray (this sample analyzed).	N4	0.30
-B		80% Mudstone, calcareous, moderate red to grayish red (CAVED).	5R-5/4 to 5R-4/2	
3595-008	5610-5620			
-A		20% Dolomite, fine crystalline, medium dark gray (this sample analyzed).	N4	0.35
-B		80% Mudstone, calcareous, moderate red to grayish red (CAVED).	5R-5/4 to 5R-4/2	
3595-009	6950-6970			
-A		20% Limestone, fine crystalline, light gray to medium dark gray (this sample analyzed).	N7 to N4	0.18
-B		80% Mudstone, calcareous, moderate red to grayish red (CAVED).	5R-5/4 to 5R-4/2	
3595-010	7010-7020			
-A		50% Limestone, fine crystalline, light gray to medium dark gray (this sample analyzed).	N7 to N4	0.15/0.14
-B		50% Mudstone, calcareous, moderate red to grayish red (CAVED).	5R-5/4 to 5R-4/2	

TABLE II (continued)

LITHOLOGICAL DESCRIPTIONS AND ORGANIC CARBON ANALYSES

NEW MEXICO HYDROCARBON SOURCE ROCK EVALUATION

TRANSOCEAN, MCKEE NO.1

SEC.4, T13N, R9E, SANTA FE COUNTY, NEW MEXICO

API #30-049-20005

GEOCHEM SAMPLE NUMBER	DEPTH INTERVAL (feet)	LITHO DESCRIPTION	GSA NO.	ORGANIC CARBON (wt.%)
3595-011	7050-7070			
-A		40% Limestone, fine crystalline, light gray to medium dark gray (this sample analyzed).	N7 to N4	0.23
-B		10% Mudstone, calcareous, dark gray.	N3	
-C		50% Mudstone, calcareous, moderate red to grayish red (CAVED).	5R-5/4 to 5R-4/2	
3595-012	7060-7080			
-A		50% Limestone, fine crystalline, light gray to medium dark gray (this sample analyzed).	N7 to N4	0.22
-B		10% Mudstone, calcareous, dark gray.	N3	
-C		40% Mudstone, calcareous, moderate red to grayish red (CAVED).	5R-5/4 to 5R-4/2	
3595-013	7140-7150			0.18
-A		50% Limestone, fine crystalline, light gray to medium dark gray.	N7 to N4	
-B		50% Mudstone, calcareous, moderate red to grayish red (CAVED).	5R-5/4 to 5R-4/2	
3595-014	7230-7240			
-A		60% Limestone, fine crystalline, light gray to medium dark gray (this sample analyzed).	N7 to N4	0.15
-B		10% Mudstone, calcareous, dark gray.	N3	
-C		30% Mudstone, calcareous, moderate red to grayish red (CAVED).	5R-5/4 to 5R-4/2	

TABLE II (continued)

LITHOLOGICAL DESCRIPTIONS AND ORGANIC CARBON ANALYSES

NEW MEXICO HYDROCARBON SOURCE ROCK EVALUATION

TRANSOCEAN, MCKEE NO.1
 SEC.4, T13N, R9E, SANTA FE COUNTY, NEW MEXICO
 API #30-049-20005

GEOCHEM SAMPLE NUMBER	DEPTH INTERVAL (feet)	LITHO DESCRIPTION	GSA NO.	ORGANIC CARBON (wt.%)
3595-015	7270-7290			
-A		70% Limestone, fine crystalline, light gray to medium dark gray (this sample analyzed).	N7 to N4	0.10
-B		10% Mudstone, calcareous, dark gray.	N3	
-C		50% Mudstone, calcareous, moderate red to grayish red (CAVED).	5R-5/4 to 5R-4/2	
3595-016	7360-7380			0.12
-A		90% Limestone, fine crystalline, light gray to medium dark gray (this sample analyzed).	N7 to N4	
-B		10% Mudstone, calcareous, moderate red to grayish red (CAVED).	5R-5/4 to 5R-4/2	
3595-017	7400-7420			0.41
-A		90% Shale, very calcareous, micaceous, dark gray.	N2	
-B		5% Limestone, fine crystalline, light gray to medium dark gray.	N7 to N4	
-C		5% Mudstone, calcareous, moderate red to grayish red (CAVED).	5R-5/4 to 5R-4/2	
3595-018	7630-7650			0.31/0.33
-A		50% Shale, very calcareous, micaceous, dark gray.	N2	
-B		40% Limestone, fine crystalline, light gray to medium dark gray.	N7 to N4	
-C		10% Mudstone, calcareous, moderate red to grayish red (CAVED).	5R-5/4 to 5R-4/2	

TABLE II (continued)

LITHOLOGICAL DESCRIPTIONS AND ORGANIC CARBON ANALYSES

NEW MEXICO HYDROCARBON SOURCE ROCK EVALUATION

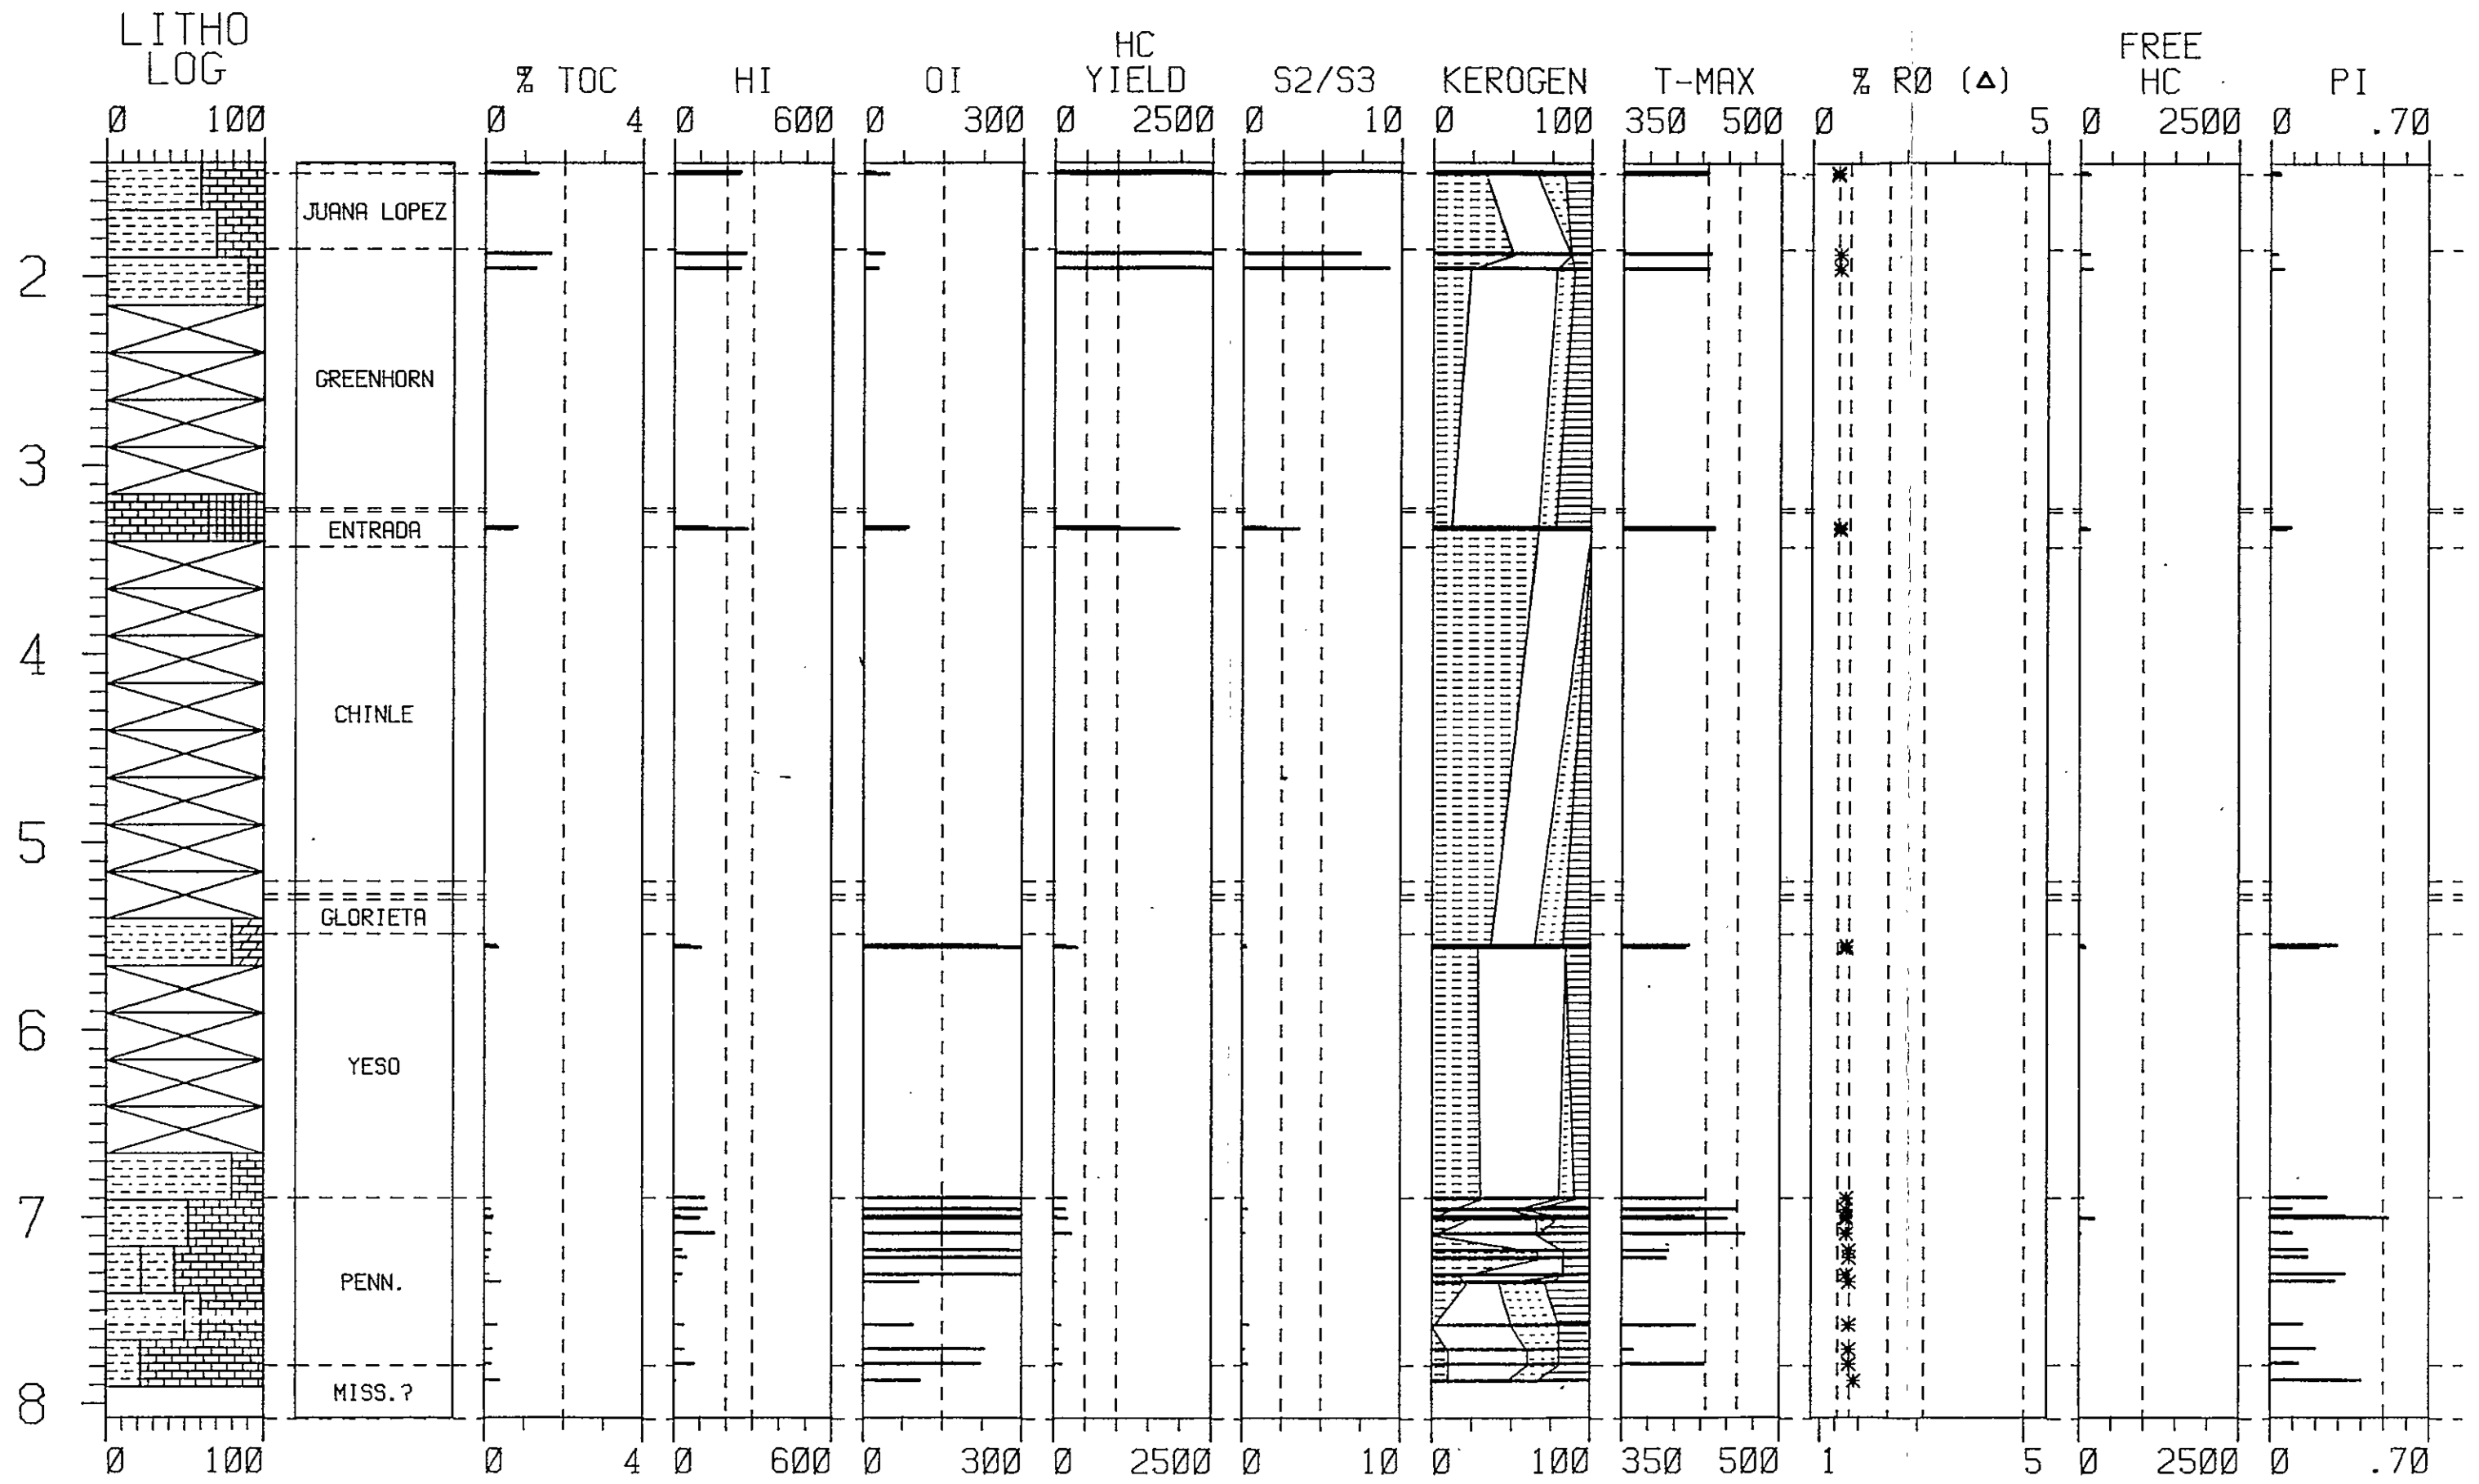
TRANSOCEAN, MCKEE NO.1

SEC.4, T13N, R9E, SANTA FE COUNTY, NEW MEXICO

API #30-049-20005

GEOCHEM SAMPLE NUMBER	DEPTH INTERVAL (feet)	LITHO DESCRIPTION	GSA NO.	ORGANIC CARBON (wt.%)
3595-019	7760-7780			0.20
-A		95% Limestone, fine crystalline, light gray to medium dark gray.	N7 to N4	
-B		5% Mudstone, calcareous, moderate red to grayish red (CAVED).	5R-5/4 to 5R-4/2	
3595-020	7840-7860			0.18
-A		100% Limestone, fine crystalline, light gray to medium dark gray. Trace red mudstone.	N7 to N4	
3595-021	7930-7950			0.39
-A		65% Shale, very calcareous, micaceous, dark gray.	N2	
-B		35% Limestone, fine crystalline, light gray to medium dark gray.	N7 to N4	

SUMMARY FIGURE 1



TAI (*)

TABLE III

SUMMARY OF ORGANIC CARBON AND VISUAL KEROGEN DATA

NEW MEXICO HYDROCARBON SOURCE ROCK EVALUATION

TRANSOCEAN, MCKEE NO.1
SEC.4, T13N, R9E, SANTA FE, NEW MEXICO
API #30-049-20005

GEOCHEM SAMPLE NUMBER	DEPTH INTERVAL (feet)	TOTAL ORGANIC CARBON	ORGANIC MATTER TYPE	VISUAL ABUNDANCE NORMALIZED PERCENT					ALTERATION STAGE	THERMAL ALTERATION INDEX
				Al	Am	H	W	I		
3595-001	1500-1510	1.10	H;Am;W-I	0	32	38	15	15	2- to $\frac{2}{2}$	2.1
3595-002	1510-1520	1.33	Am-H;W-I;-	0	33	33	17	17	2- to $\frac{2}{2}$	2.1
3595-003	1930-1950	1.66	Am;H*;I	0	50	37	0	13	2	2.2
3595-004	2010-2040	1.28	H;Am;W-I	0	23	55	11	11	2	2.2
3595-005	2380-3390	0.41	H;I;Am-W	0	11	55	11	23	2	2.2
3595-006	3390-3400	0.57	Am;H;-	0	66	34	0	0	2	2.2
3595-007	5600-5610	0.30	Am;H;W-I	0	36	28	18	18	2 to 2+	2.4
3595-008	5610-5620	0.35	H;Am;I	0	28	56	0	16	2 to 2+	2.4
3595-009	6950-6970	0.18	H;Am;W-I	0	30	50	10	10	2 to 2+	2.4
3595-010	7010-7030	0.15/0.14	H-I;-;Am-I	0	10	40	10	40	2 to 2+	2.4
3595-011	7050-7070	0.23	H;-;W-I	0	0	68	16	16	2 to 2+	2.4
3595-012	7060-7080	0.22	H;Am-I;W	0	22	44	12	22	2 to 2+	2.4
3595-013	7140-7150	0.18	H;I;-	0	0	66	0	34	2 to 2+	2.4
3595-014	7230-7240	0.15	Am**;-;H-I	0	66	17	0	17	2 to 2+	2.5
3595-015	7270-7290	0.10	Am**;-;H-I	0	66	17	0	17	2 to $\frac{2}{2}$	2.5
3595-016	7360-7380	0.12	H;-;Am-I	0	17	66	0	17	2 to $\frac{2}{2}$	2.4
3595-017	7400-7420	0.41	W-I;Am**-H;-	0	21	21	29	29	2 to 2+	2.5
3595-018	7630-7650	0.31/0.33	H;W;I	0	0	50	30	20	2 to $\frac{2}{2}$	2.5
3595-019	7760-7780	0.20	H;W-I;Am	0	10	50	20	20	2 to $\frac{2}{2}$	2.5
3595-020	7840-7860	0.18	H;W-I;Am	0	10	50	20	20	2 to $\frac{2}{2}$	2.5
3595-021	7930-7950	0.39	H-I;W;Am**	0	10	36	18	36	2+	2.6

LEGEND:

KEROGEN KEY

Predominant; Secondary; Trace
60-100% 20-40% 0-20%

Al = Algal
Am = Amorphous-Sapropel
Am** = Relic Amorphous-Sapropel
H = Herbaceous-Spore/Pollen
H* = Degraded Herbaceous
W = Woody-Structured
U = Unidentified Material
I = Inertinite
C = Coaly

TABLE IV

RESULTS OF ROCK-EVAL PYROLYSIS ANALYSIS

NEW MEXICO HYDROCARBON SOURCE ROCK EVALUATION

TRANSOCEAN, MCKEE NO.1
 SEC.4, T13N, R9E, SANTA FE, NEW MEXICO
 API #30-049-20005

GEOCHEM SAMPLE NUMBER	DEPTH INTERVAL (Feet)	TMAX (c)	S1 (mg/g)	S2 (mg/g)	S3 (mg/g)	PI	PC*	T.O.C. (wt.%)	HYDROGEN INDEX	OXYGEN INDEX
3595-001	1500-1510	430	0.11	2.78	0.22	0.04	0.24	1.10	252	20
3595-002	1510-1520	429	0.15	3.32	0.61	0.04	0.28	1.33	249	45
3595-003	1930-1950	433	0.14	4.51	0.61	0.03	0.38	1.66	271	36
3595-004	2010-2040	431	0.19	3.21	0.35	0.06	0.28	1.28	250	27
* 3595-005	2380-3390	437	0.05	0.52	0.35	0.09	0.04	0.41	126	85
* 3595-006	3390-3400	437	0.12	1.60	0.45	0.07	0.14	0.57	280	78
3595-007	5600-5610	414	0.08	0.19	0.76	0.31	0.02	0.30	63	253
3595-008	5610-5620	410	0.10	0.37	1.43	0.22	0.03	0.35	105	408
3595-009	6950-6970	427	0.07	0.21	1.80	0.25	0.02	0.18	116	1000
3595-010	7010-7030	459	0.02	0.19	0.65	0.10	0.01	0.15	126	433
3595-011	7050-7070	419	0.03	0.06	1.37	0.37	0.00	0.23	26	595
3595-012	7060-7080	450	0.24	0.22	2.10	0.52	0.03	0.22	100	954
3595-013	7140-7150	467	0.03	0.28	1.50	0.10	0.02	0.18	155	833
3595-014	7230-7240	394	0.01	0.05	0.77	0.17	0.00	0.15	33	513
3595-015	7270-7290	392	0.01	0.05	0.80	0.17	0.00	0.10	50	800
3595-016	7360-7380	342	0.02	0.04	0.47	0.33	0.00	0.12	33	391
3595-017	7400-7420	276	0.02	0.05	0.43	0.33	0.00	0.41	12	104
3595-018	7630-7650	420	0.02	0.12	0.29	0.14	0.01	0.33	36	87
3595-019	7760-7780	361	0.02	0.08	0.46	0.20	0.00	0.20	40	230
3595-020	7840-7860	428	0.02	0.14	0.40	0.12	0.01	0.18	77	222
3595-021	7930-7950	322	0.02	0.03	0.42	0.50	0.00	0.39	7	107

T.O.C. = Total organic carbon, wt.%

S1 = Free hydrocarbons, mg HC/g of rock

S2 = Residual hydrocarbon potential
(mg HC/g or rock)S3 = CO₂ produced from kerogen pyrolysis
(mg CO₂/g of rock)

PC* = 0.083 (S1 + S2)

Hydrogen
Index = mg HC/g organic carbon

Oxygen

Index = mg CO₂/g organic carbon

PI = S1/S1 + S2

TMAX = Temperature Index, degrees C.

* SEE APPENDIX AT REAR OF REPORT

APPENDIX

*NOTE: These samples were mixtures of caved anhydrite and indigenous limestone material.

The picking of an indigenous sample was impractical so the sample was analyzed without picking. An "Adjusted TOC" value for indigenous material was calculated as follows:

$$(F_I)(TOC_I) + (F_C)(TOC_C) = (1)(TOC_T)$$

$$TOC_I = \frac{TOC_T - (F_C)(TOC_C)}{F_I}$$

Where F_I = fraction of indigenous sample TOC_I = TOC of indigenous sample
 F_C = fraction of CAVED material TOC_C = TOC of CAVED material
 TOC_T = TOC of Total sample

The data are presented in Appendix A.

In like manner, adjusted values have been computed for the Rock-Eval data. These are shown in Appendix B.

No adjustments were needed for the visual kerogen data since the red beds do not contain any kerogen of any significance.

APPENDIX A

ORGANIC CARBON VALUES CORRECTED FOR CAVED MATERIAL

GEOCHEM SAMPLE NUMBER	DEPTH INTERVAL (feet)	TOTAL ORGANIC CARBON (% of Rock) (Total Sample Analyzed)	BRIEF LITHOLOGIC DESCRIPTION	ADJUSTED TOC* Value allowing for non separated caved material
3595-005	3380-3390	0.41	Limestone, (50% Anhy, CAVE)	0.82
3595-006	3390-3400	0.57	Limestone, (20% Anhy, CAVE)	0.71

APPENDIX B

ROCK-EVAL PYROLYSIS ANALYSIS CORRECTED FOR CAVED MATERIAL

NEW MEXICO HYDROCARBON SOURCE ROCK EVALUATION

TRANSOCEAN, MCKEE NO.1
 SEC.4, T13N, R9E, SANTA FE, NEW MEXICO
 API #30-049-20005

GEOCHEM SAMPLE NUMBER	DEPTH INTERVAL (Feet)	TMAX (c)	S1 (mg/g)	S2 (mg/g)	S3 (mg/g)	PI	PC*	T.O.C. (wt.%)	HYDROGEN INDEX	OXYGEN INDEX
3595-005	2380-3390	437	0.10	1.02	0.70	0.09	0.09	0.82	126	85
3595-006	3390-3400	437	0.15	1.98	0.56	0.07	0.18	0.71	280	78

T.O.C. = Total organic carbon, wt.%
 S1 = Free hydrocarbons, mg Hc/g of rock
 S2 = Residual hydrocarbon potential
 (mg HC/g or rock)

S3 = CO₂ produced from kerogen pyrolysis
 (mg CO₂/g of rock)
 PC* = 0.083 (S1 + S2)
 Hydrogen
 Index = mg HC/g organic carbon



















Oxygen
 Index = mg CO₂/g organic carbon
 PI = S1/S1 + S2
 TMAX = Temperature Index, degrees C.





LEGEND FOR SUMMARY DIAGRAM

<u>DEPTH:</u>	in feet
<u>LITHO LOG:</u>	see lithology symbols
<u>STRATIGRAPHY:</u>	by age
<u>% TOC:</u>	percent total organic carbon
<u>HI:</u>	Rock-Eval, Hydrocarbon Index = $100 S2(0/00 Wt)/TOC$
<u>OI:</u>	Rock-Eval, Oxygen Index = $100 S3(0/00 Wt)/TOC$
<u>HC YIELD:</u>	Rock-Eval, S2 peak (ppm)
<u>S2/S3:</u>	Rock-Eval, Ratio of S2 to S3 peak
<u>KEROGEN:</u>	see Kerogen symbols
<u>T-MAX:</u>	Rock-Eval, maximum temperature of S2 peak, in degrees Centigrade
<u>%RO (Δ):</u>	Vitrinite Reflectance (scale 0 to 5)
<u>TAI (*):</u>	Thermal Alteration Index (Scale 1 to 5)
<u>FREE HC:</u>	Rock-Eval, S1 peak (ppm)
<u>PI:</u>	Rock-Eval, Productivity Index = $S1/(S1+S2)$

LITHOLOGIES

KEROGEN' TYPES

	SHALE		SILICEOUS ROCKS
	MUDSTONE		EVAPORITES
	SILTSTONE		COAL
	SANDSTONE		IGNEOUS ROCKS
	CONGLOMERATE		VOLCANICS
	BRECCIA		METAMORPHIC ROCKS
	LIMESTONE		BASEMENT
	DOLOMITE		OTHER
	MARL		MISSING SECTION

	AMORPHOUS
	HERBACEOUS
	WOODY
	INERTINITE

APPENDIX A

Brief Description of Organic Geochemical analyses Carried Out by GeoChem

C₁-C₇ Hydrocarbon

The C₁-C₇ hydrocarbon content and composition of sediments reflects source type, source quality and thermal maturity.

The C₁-C₇ hydrocarbon content of well cuttings is determined by analyzing both a sample of the cuttings and the air space at the top of the can. The results of the two analyses are summed to give an inventory of the C₁-C₇ hydrocarbon content of the well cuttings prior to any losses from the cuttings during the lapsed time period between collection at the wellsite and laboratory analysis.

The air space C₁-C₇ hydrocarbon analysis involves taking a measured volume of the air space gas out of the can with a syringe and injecting same into a gas chromatograph. GeoChem uses a Varian Aerograph Model 1400 instrument equipped with a Porapak Q column. The gas sample is taken through the column by a carrier gas and before reaching the detector is separated into its various C₁ (methane), C₂ (ethane), C₃ (propane), iC₄ (isobutane), nC₄ (normal butane), and C₅, C₆, C₇ hydrocarbon components.

This particular analysis gives a complete separation of the C₁-C₄ gas-range hydrocarbons and a partial separation of the C₅-C₇ gasoline-range hydrocarbons. (A detailed C₄-C₇ analysis, to be discussed later, involving a capillary column, effects a complete separation of this molecular range into its several individual molecular species.)

The electrical response of the various hydrocarbons as they reach the detector is recorded on a paper strip chart as a peak. This response is simultaneously fed to an integrator which computes the area of each peak. The concentration of C₁-C₇ hydrocarbons in the air space, expressed as volumes of gas per million volumes of cuttings, is determined by a calculation involving the volume of cuttings, volume of air space in the can, volume of sample injected, volume of standard gas sample used in the calibration, calibration factor for C₁, C₂, C₃, etc. determined by gc analysis of a standard gas sample, and the gc peak response.

The C₁-C₇ hydrocarbon content of the cuttings is determined by degasification of a measured volume of cuttings (in a medium of a measured volume of water) in a closed blender, sampling of the air space at the top of the blender, and injection of a measured volume of gas into the gas chromatograph.

The C₁-C₇ hydrocarbon data from the air space and cuttings gas analyses are summed to give a "restored" C₁-C₇ hydrocarbon content of the cuttings.

Sample Washing and Hand-Picking of Uncaved Lithology Samples

The cuttings samples are washed to remove all drilling mud from the cuttings. Care is taken in the washing procedure not to remove any soft clays, claystones, etc. and any loose fine sand and silt. The washed cuttings are usually kept under water cover until picked, to prevent loss of any gasoline-range hydrocarbons. Using the C₁-C₇ hydrocarbon data profile and the electrical well log supplied to us and our visual examination of the cuttings material under the binocular microscope, we carefully hand-pick and describe a suite of uncaved lithologies representative of the various stratigraphic zones penetrated by the well. The lithological data is used to compile a gross litho percentage log which is shown on all Figures. The 2-4 gram picked lithology samples are stored under water in small glass vials in those instances where we wish to run detailed C₄-C₇ hydrocarbon analyses. This sample set is used not only for the C₄-C₇ hydrocarbon analysis, but also for the visual kerogen and total organic carbon analyses. All remaining cuttings material is dried and packaged in labelled plastic bags for possible C₁₅₊ soxhlet extraction and/or eventual return to the client. Sample material from this study will be retained at GeoChem until advised of disposition.

Detailed C₄-C₇ Hydrocarbon

The C₄-C₇ gasoline-range hydrocarbon content of sediments reflects source quality, thermal maturation and organic facies. Compositional data can be used in crude oil-parent rock correlation work.

The C₄-C₇ hydrocarbon content and detailed molecular composition of hydrocarbon, in hand-picked lithologies, is determined by a gc analysis of the light hydrocarbon extracted from 1-2 gram cuttings samples macerated in a microblender. A measured volume of sample is placed in a sealed microblender along with a measured volume of hot water. The rock sample is pulverized by the blades of the blender. A sample of the liberated light hydrocarbons which collect in the air space at the top of the blender is injected into our Varian Aerograph 1400 gc unit which is equipped with a capillary column. Data recording, computations, etc. are comparable to those used for the C₁-C₇ analysis discussed previously in this report. Hydrocarbon concentration is expressed as volume gas per million volumes of cuttings.

Organic Carbon

The total organic carbon content of a rock is a measure of its total organic richness. This data is used, in conjunction with visual kerogen and C₁-C₄, C₄-C₇ and C₁₅₊ hydrocarbon content of a rock, to indicate the hydrocarbon source quality of rocks.

The procedure for determining the total organic carbon content of a rock involves drying the sample, grinding to a powder, weighing out 0.2729 gram sample into a crucible, acidizing with hot and cold hydrochloric acid to remove calcium and magnesium carbonate, and carbon analysis by combustion in a Leco carbon analyzer.

We run several blank crucibles, standards (iron rings of known carbon content) and duplicate rock samples in this analysis at no additional charge to the client for purposes of data quality control.

C₁₅₊ Soxhlet Extraction, Deasphalting and Chromatographic Separation

The amount and composition of the organic matter which can be solvent-extracted from a rock reflects source quality and source type. C¹³/C¹² carbon isotopic, high mass spectrometric and gc analyses of the paraffin-naphthene and aromatic hydrocarbon fractions of the soluble extract gives data which is used in crude oil-parent rock correlations. This analysis involves grinding of a dry rock sample to a powder and removal of the soluble organic matter by soxhlet extraction using a co-distilled toluene-methanol azeotrope solvent. Where the amount of available sample material permits, we like to use at least 100 grams of rock for this analysis.

The extracted bitumen is separated into an asphaltene (ASPH) and a pentane soluble fraction by normal pentane precipitator. The pentane soluble components are separated into a C₁₅₊ paraffin-naphthene (P-N) hydrocarbon, C₁₅₊ aromatic hydrocarbon (AROM) and C₁₅₊ nitrogen-sulfur-oxygen containing fraction (NSO) by adsorption chromatography on a silica gel-alumina column using pentane, toluene and toluene-methanol azeotrope eluants.

GC Analysis of C₁₅₊ Paraffin-Naphthene (P-N) Hydrocarbons

The content and molecular composition of the heavy C₁₅₊ paraffin-naphthene (P-N) hydrocarbons of rocks, as determined by gc analysis, reflects source quality, source type and degree of thermal maturation.

In this analysis, we subject a very small fraction of the total amount of the P-N fraction extracted from a rock sample to gc analysis. The gas chromatograph is a Varian Aerograph Model 1400 equipped with a solid rod injection system and a eutectic column.

The calculated C. P. I. (carbon preference index) values for the normal paraffin data is defined as the mean of two ratios which are determined by dividing the sum of concentrations of odd-carbon numbered n-paraffins by the sum of even-carbon numbered n-paraffins. The C. P. Indices A and B were obtained by the formulas;

$$C. P. Index A = \frac{C_{21}+C_{23}+C_{25}+C_{27}}{C_{22}+C_{24}+C_{26}+C_{28}} + \frac{C_{21}+C_{23}+C_{25}+C_{27}}{C_{20}+C_{22}+C_{24}+C_{26}}$$

$$C. P. Index B = \frac{C_{25}+C_{27}+C_{29}+C_{31}}{C_{26}+C_{28}+C_{30}+C_{32}} + \frac{C_{25}+C_{27}+C_{29}+C_{31}}{C_{24}+C_{26}+C_{28}+C_{30}}$$

Visual Kerogen

A visual study of kerogen, the insoluble organic matter in rocks, can indicate the relative abundance, size, and state of preservation of the various recognizable kerogen types and thereby indicate the hydrocarbon source character of a rock. The color of the kerogen can be used to indicate the state of thermal maturity of the sediments (i.e. their time-temperature history). Thermal maturation plays an important role in the generation of hydrocarbons from organic matter, and also affects the composition of reservoired hydrocarbons.

Our procedure for visual kerogen slide preparation involves isolation of the organic matter of a rock by removal of the rock material with hydrochloric and hydrofluoric acid treatment and heavy liquid separation. This procedure is comparable to that used by the palynologist except it does not include an oxidation stage. (The oxidation treatment is deleted from our procedure because it removes a great deal of kerogen and bleaches any remaining kerogen to an extent whereby it is useless for our kerogen color observations.) The kerogen residue is mounted on a glass slide and is examined visually under a high power microscope.

Vitrinite Reflectance

Measurement of the reflectivity of vitrinite particles (R_v) present in the kerogen isolated from sedimentary rocks provides a method of determining the state of maturation, and the diagenetic (time-temperature) history of the organic matter present in the sediments.

The kerogen, obtained from a 25 gram aliquot of crushed rock by the acid procedure previously discussed, is dried and embedded in a Bioplastic plug. The surface of the plug is polished using 0.05 micron alumina and the reflectivity determined under oil using a Zeiss high resolution microscope. A minimum of 40 values are required to adequately determine the Maturation Rank.

Fluorescence Spectrophotometric Analysis

Fluorescence spectrophotometry can be used to characterize and fingerprint crude oils, establish crude oil-source rock relationships, and to measure the hydrocarbon source potential of fine-grained sediments.

A one (1) microliter aliquot of either (1) a crude oil or (2) the solvent extractable rock bitumen, is passed through an alumina/silica gel micro column and the C₁₀₊ aromatic hydrocarbons isolated. The aromatic hydrocarbon is diluted and the emission and excitation spectra determined at 240 nm and 420 nm using a Perkin-Elmer Model 512 Double Beam Fluorescence Spectrophotometer.

GEOHERMAL DIAGENETIC CRITERIA

(GEOCHEM LABORATORIES, INC)

